



### AF1238 SERIES

AC FAN

Operating Temp. Range : -30 - +70


Impedance Protected  
Bearing : Ball Bearing  
Housing : Aluminum  
Fan Blade : Plastic



120 x 120 x 38 mm

Type	Model (xxx=Voltage)	Rated Voltage VAC	Frequency Hz	Rated Input W	Rated Speed rpm	Mix. Airflow m <sup>3</sup> /min. CFM	Mix. Static Pressure mmAq inchAq	Noise Level dB(A) / m	Weight gr
Low Speed	* AF1238T-xxxL	100, 115, 120, 200	50	13	1900	1.9 67	4 0.157	37	550
		220, 230, 240	60	12	2000	2.0 71	4 0.157	38	
Middle Speed	* AF1238T-xxxM	100, 115, 120, 200	50	15	2150	2.2 78	5 0.197	40	
		220, 230, 240	60	14	2350	2.4 85	5 0.197	42	
High Speed	* AF1238T-xxxH	100, 115, 120, 200	50	16	2650	2.7 95	9 0.354	45	
		220, 230, 240	60	15	3000	3.0 106	9 0.354	49	

\* Approvals = UL / CSA

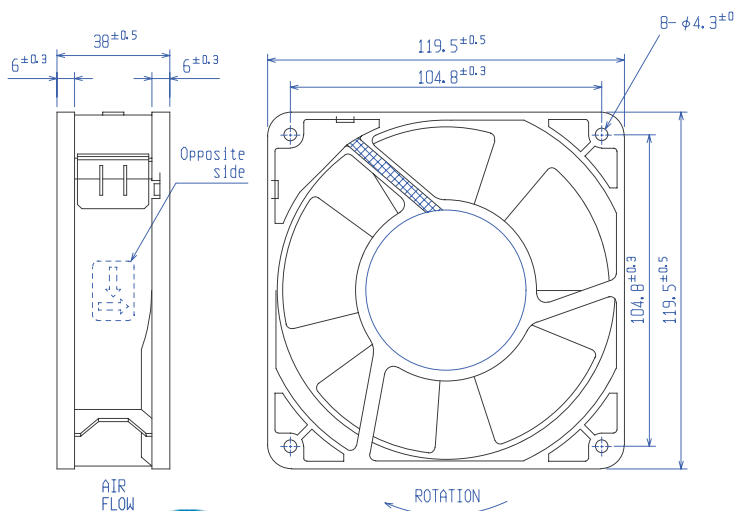

50H  
Z  
  
60H  
Z

