


AXIAL DC FAN

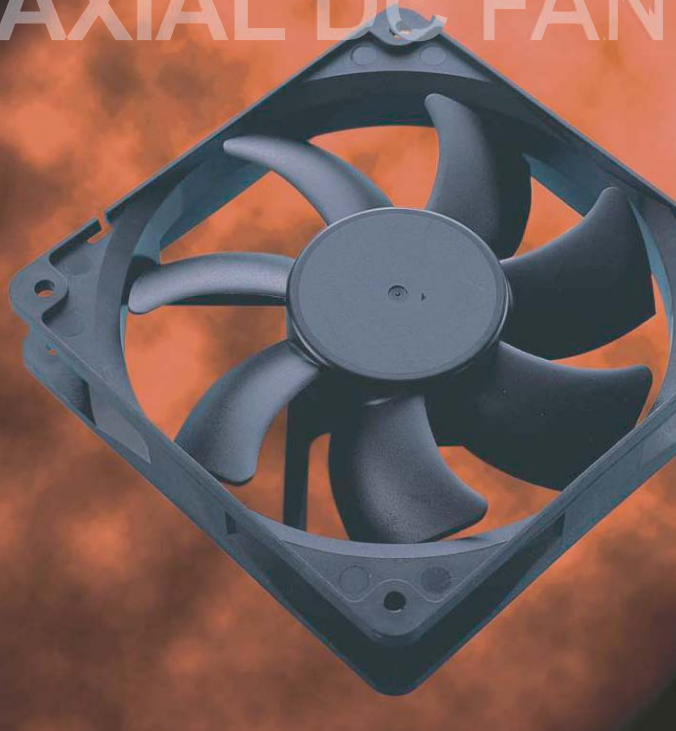

http://www.ETdyn.com
 email: info@ETdyn.com
 26-27 Chartwell Drive Ind Est
 S.Wigston
 Leicester, LE18 2FL, UK

FD1225 SERIES

120x120x25mm

- Airflow: 74.40~105.00 CFM
- Static Pressure: 3.20~6.20 mm-H₂O
- Blade / Housing: Plastic Material UL 94-0 P.B.T.
- Lead Wire: UL1007 #22 AWG
- Weight: 160g

Model	Bearing	Rated Voltage	Operating Voltage Range	Power Consumption	Rated Speed	Max. Airflow	Max. Static Pressure	Noise	Life	Weight
		VDC	VDC	W	RPM	CFM	mm-H ₂ O			
FD1212253B-2F	2B	12	7~17	2.16	1,800	74.40	3.20	36.0	80,000	160
FD1212255B-2F	2B		7~17	3.48	2,200	92.00	4.70			
FD1212257B-2F	2B		7~17	5.52	2,600	105.00	6.20			
FD2412253B-2F	2B	24	12~33	2.40	1,800	74.40	3.20	36.0	80,000	160
FD2412255B-2F	2B		12~33	3.84	2,200	92.00	4.70			
FD2412257B-2F	2B		12~33	6.72	2,600	105.00	6.20			
FD4812253B-2F	2B	48	24~56	3.36	1,800	74.40	3.20	36.0	80,000	160
FD4812255B-2F	2B		24~56	6.24	2,200	92.00	4.70			
FD4812257B-2F	2B		24~56	8.16	2,600	105.00	6.20			


● 2B: 2-ball bearing BS: 1-ball 1-sleeve bearing S: sleeve bearing

Voltage Available
 05 12 24 48 53


Bearing System Available
 2B BS S

Function Available
 N A I F R Q S T M V C P W

PERFORMANCE P-Q CURVE

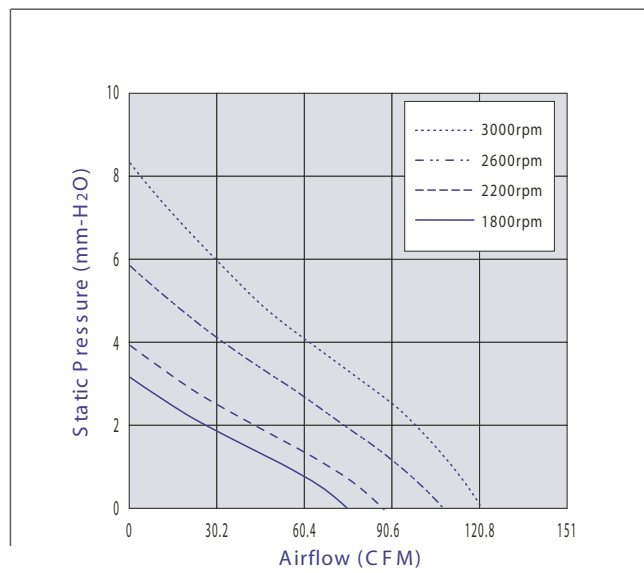

OUTLINE DIMENSIONS

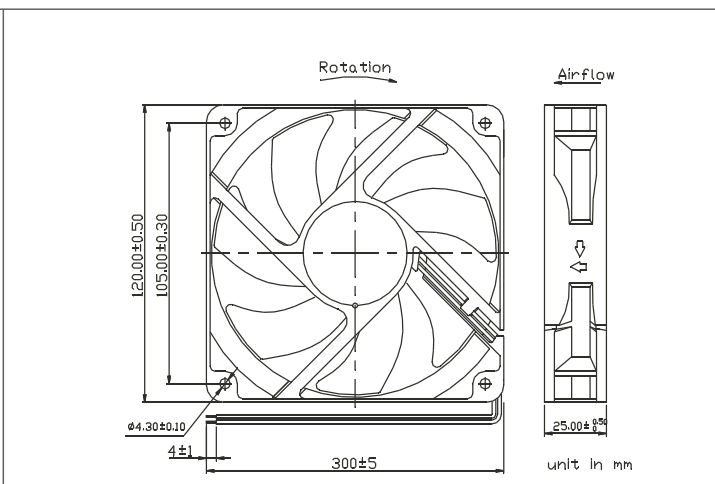

Customized Specifications are designed accordingly. Specifications are subject to change without notice. Please visit Y.S. TECH web site at <http://www.ystech.com.tw> for updated information.