


AXIAL DC FAN

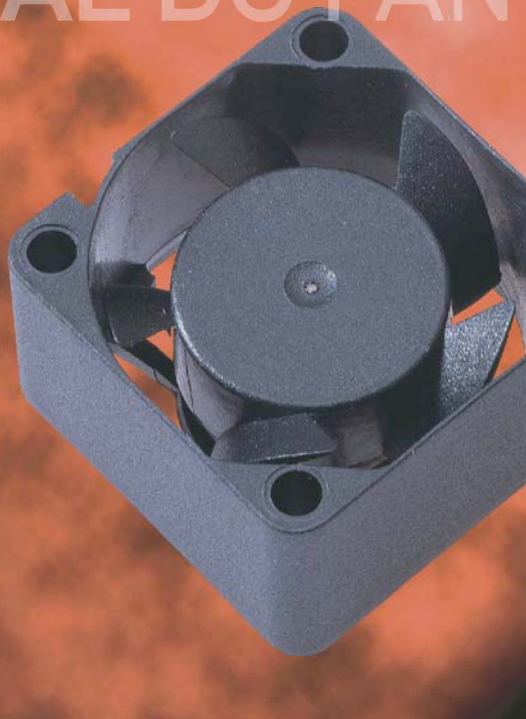

European Thermodynamics Limited
Intelligent Thermal Management

<http://www.etedyn.com>
email: info@etedyn.com
26-27 Chartwell Drive Ind Est
S. Wigston
Leicester, LE18 2FL, UK

FD2515N SERIES

25x25x15mm

- Airflow: 2.29~2.70 CFM
- Static Pressure: 2.53~3.40 mm-H₂O
- Blade / Housing: Plastic Material UL 94-0 P.B.T.
- Lead Wire: UL1571 #28 AWG
- Weight: 10g

Model	Bearing	Rated Voltage	Operating Voltage Range	Power Consumption	Rated Speed	Max. Airflow	Max. Static Pressure	Noise	Life	Weight
		VDC	VDC	W	RPM	CFM	mm-H ₂ O			
NFD0525153B-2F	2B	5	4~7	0.20	8,000	2.29	2.53	17.9	80,000	10
NFD0525155B-2F	2B		4~7	0.28	8,700	2.50	3.00	19.5	80,000	10
NFD0525157B-2F	2B		4~7	0.45	9,700	2.70	3.40	22.3	75,000	10
NFD0525153B-1F	BS		4~7	0.20	8,000	2.29	2.53	17.9	50,000	10
NFD0525155B-1F	BS		4~7	0.28	8,700	2.50	3.00	19.5	50,000	10
NFD0525157B-1F	BS		4~7	0.45	9,700	2.70	3.40	22.3	75,000	10

● 2B: 2-ball bearing BS: 1-ball 1-sleeve bearing S: sleeve bearing

Voltage Available

05 12 24 48 53


Bearing System Available

2B BS S


Function Available

N A I F R Q S T M V C P W

PERFORMANCE P-Q CURVE

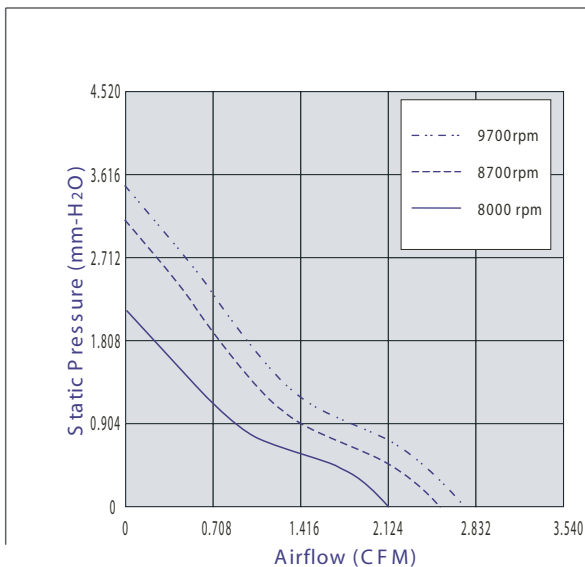

OUTLINE DIMENSIONS

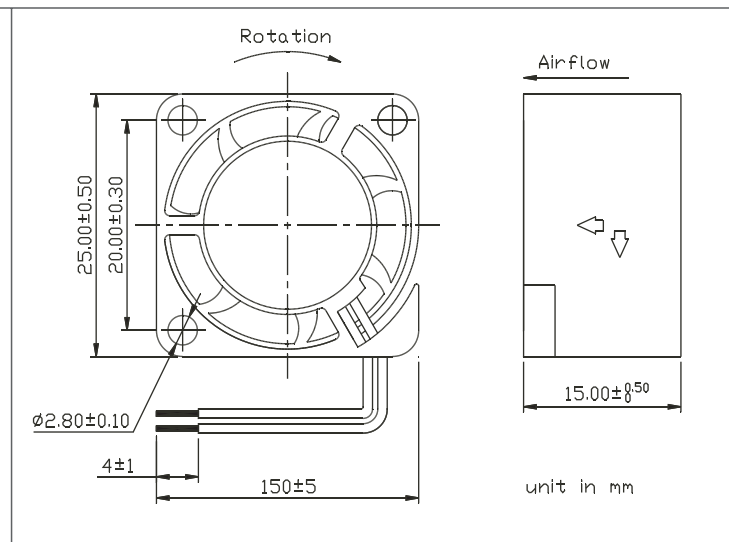

Customized Specifications are designed accordingly.
Specifications are subject to change without notice. Please visit Y.S. TECH web site at <http://www.ystech.com.tw> for updated information.