



FD3015 SERIES

30x30x15mm

- Airflow: 2.70~4.59 CFM
- Static Pressure: 2.50~5.56 mm-H₂O
- Blade / Housing: Plastic Material UL 94-0 P.B.T.
- Lead Wire: UL1571 #28 AWG
- Weight: 13g

Model	Bearing	Rated Voltage	Operating Voltage Range	Power Consumption	Rated Speed	Max. Airflow	Max. Static Pressure	Noise	Life	Weight
		VDC	VDC	W	RPM	CFM	mm-H ₂ O	dB(A)	Hour	g
FD0530153B-2A	2B	5	4~7	0.25	6,000	3.20	2.50	19.0	80,000	13
FD0530154B-2A	2B		4~7	0.35	7,000	3.70	3.40	21.5	80,000	13
FD0530155B-2A	2B		4~7	0.40	8,000	4.30	4.40	24.0	80,000	13
FD0530157B-2A	2B	12	4~7	0.80	10,000	4.59	5.56	27.3	75,000	13
FD1230153B-2A	2B		7~17	0.48	6,000	2.70	2.00	16.4	80,000	13
FD1230155B-2A	2B		7~17	0.60	8,000	4.30	4.40	24.0	80,000	13
FD1230157B-2A	2B	7~17	0.84	10,000	4.59	5.56	27.3	75,000	13	

● 2B: 2-ball bearing BS: 1-ball 1-sleeve bearing S: sleeve bearing

Voltage Available

05 12 24 48 53


Bearing System Available

2B BS S


Function Available

NA I F R Q S T M V C P W

PERFORMANCE P-Q CURVE

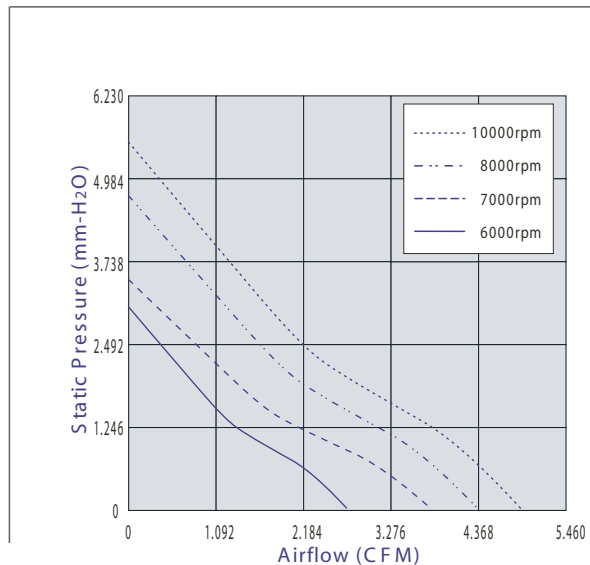


OUTLINE DIMENSIONS

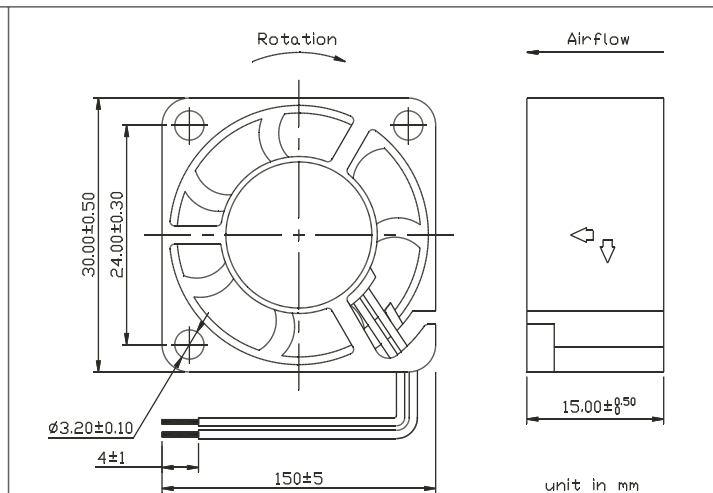

Customized Specifications are designed accordingly. Specifications are subject to change without notice. Please visit Y.S. TECH web site at <http://www.ystech.com.tw> for updated information.

AXIAL DC FAN

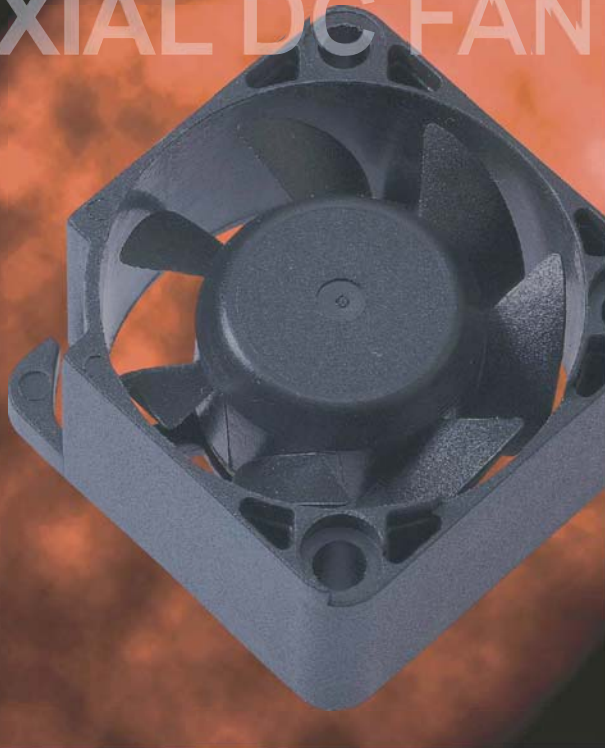

European Thermodynamics Limited
Intelligent Thermal Management

http://www.ETdyn.com
email: info@ETdyn.com
26-27 Chartwell Drive Ind Est
S. Wigston
Leicester, LE18 2FL, UK

FD3015N SERIES

30x30x15mm

- Airflow: 2.90 CFM
- Static Pressure: 2.00 mm-H₂O
- Blade / Housing: Plastic Material UL 94-0 P.B.T.
- Lead Wire: UL1571 #28 AWG
- Weight: 13g

Model	Bearing	Rated Voltage	Operating Voltage Range	Power Consumption	Rated Speed	Max. Airflow	Max. Static Pressure	Noise	Life	Weight
		VDC	VDC	W	RPM	CFM	mm-H ₂ O	dB(A)	Hour	g
NFD0530153B-2A	2B	5	4~7	0.30	6,000	2.90	2.00	16.5	80,000	13

● 2B: 2-ball bearing BS: 1-ball 1-sleeve bearing S: sleeve bearing

Voltage Available

05 12 24 48 53


Bearing System Available

2B BS S


Function Available

N A I F R Q S T M V C P W

PERFORMANCE P-Q CURVE

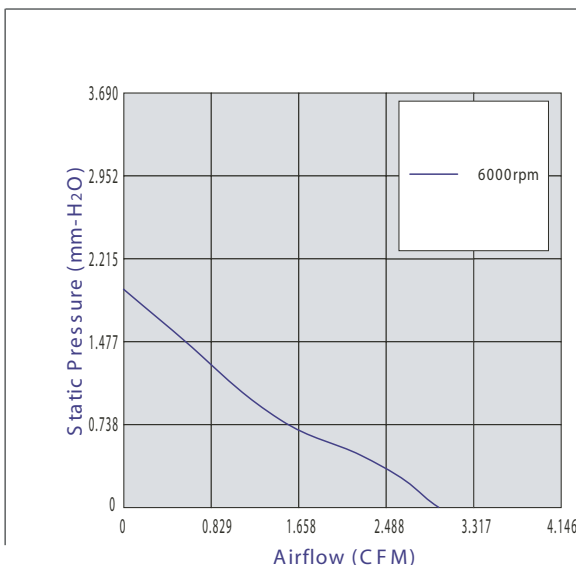

OUTLINE DIMENSIONS

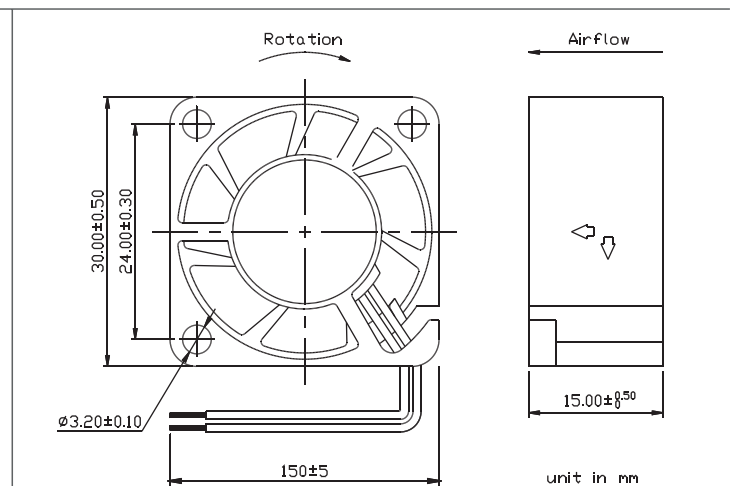

Customized Specifications are designed accordingly.
Specifications are subject to change without notice. Please visit Y.S. TECH web site at <http://www.ys-tech.com.tw> for updated information.