

AXIAL DC FAN



http://www.etcdyn.com
 email: info@etcdyn.com
 26-27 Chartwell Drive Ind Est
 S.Wigston
 Leicester, LE18 2FL, UK

FD6020 SERIES

60x60x20mm

- Airflow: 17.20~22.90 CFM
- Static Pressure: 1.80~4.40 mm-H₂O
- Blade / Housing: Plastic Material UL 94-0 P.B.T.
- Lead Wire: UL1007 #26 AWG
- Weight: 44 g

Model	Bearing	Rated Voltage	Operating Voltage Range	Power Consumption	Rated Speed	Max. Airflow	Max. Static Pressure	Noise	Life	Weight
		VDC	VDC	W	RPM	CFM	mm-H ₂ O	dB (A)	Hour	g
FD1260203B-2A	2B	12	7~17	0.96	3,000	17.20	2.10	25.0	80,000	44
FD1260203B-2N	2B		7~17	0.96	3,000	17.20	2.10	25.0	80,000	44
FD1260205B-2A	2B		7~17	1.32	3,600	20.70	3.00	31.0	80,000	44
FD1260205B-2N	2B		7~17	1.32	3,600	20.70	3.00	31.0	80,000	44
FD1260207B-2A	2B		7~17	1.92	4,200	22.90	4.40	35.0	75,000	44
FD1260207B-2N	2B		7~17	1.92	4,200	22.90	4.40	35.0	75,000	44

● 2B: 2-ball bearing BS: 1-ball 1-sleeve bearing S: sleeve bearing

Voltage Available

05 12 24 48 53


Bearing System Available

2B BS S


Function Available

N A I F R Q S T M V C P W

PERFORMANCE P-Q CURVE

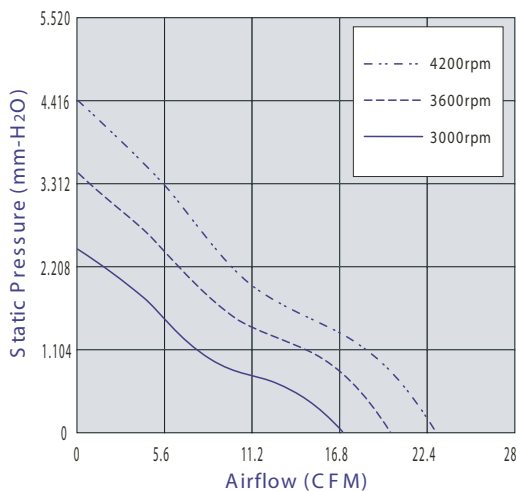

OUTLINE DIMENSIONS

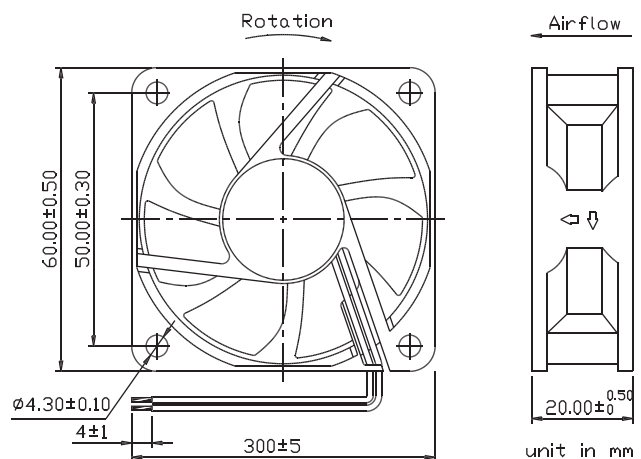

Customized Specifications are designed accordingly. Specifications are subject to change without notice. Please visit Y.S. TECH web site at <http://www.ys-tech.com.tw> for updated information.