



## FD7015 SERIES

### 70x70x15mm

- Airflow: 30.80~36.50 CFM
- Static Pressure: 4.10~5.60 mm-H<sub>2</sub>O
- Blade / Housing: Plastic Material UL 94-0 P.B.T.
- Lead Wire: UL1007 #26 AWG
- Weight: 54 g

Model	Bearing	Rated Voltage	Operating Voltage Range	Power Consumption	Rated Speed	Max. Airflow	Max. Static Pressure	Noise	Life	Weight
		VDC	VDC	W	RPM	CFM	mm-H <sub>2</sub> O	dB(A)	Hour	g
FD1270153B-1F	BS	12	7~17	1.56	4,000	30.80	4.10	34.0	50,000	54
FD1270153B-2F	2B		7~17	1.56	4,000	30.80	4.10	34.0	80,000	54
FD1270155B-1F	BS		7~17	2.28	4,500	32.30	4.40	37.5	50,000	54
FD1270155B-2F	2B		7~17	2.28	4,500	32.30	4.40	37.5	80,000	54
FD1270157B-1F	BS		7~17	3.12	5,000	36.50	5.60	40.0	50,000	54
FD1270157B-2F	2B		7~17	3.12	5,000	36.50	5.60	40.0	75,000	54

● 2B: 2-ball bearing BS: 1-ball 1-sleeve bearing S: sleeve bearing

#### Voltage Available

05 12 24 48


#### Bearing System Available

2BBS S


#### Function Available

N A I F R Q S T M V C P W

#### PERFORMANCE P-Q CURVE

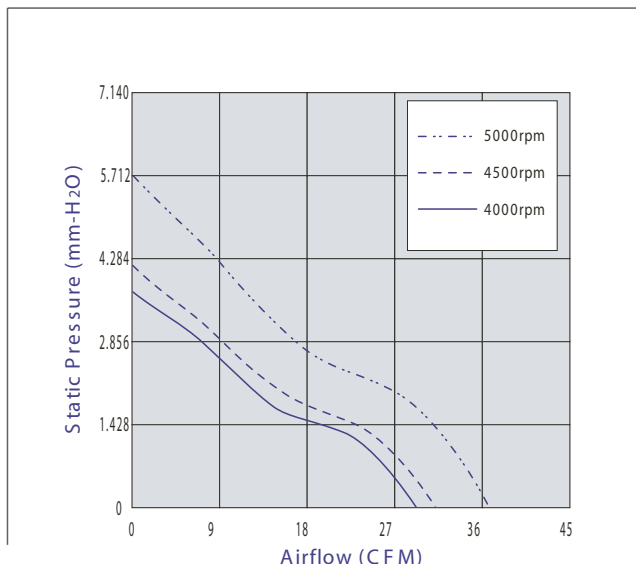

#### OUTLINE DIMENSIONS

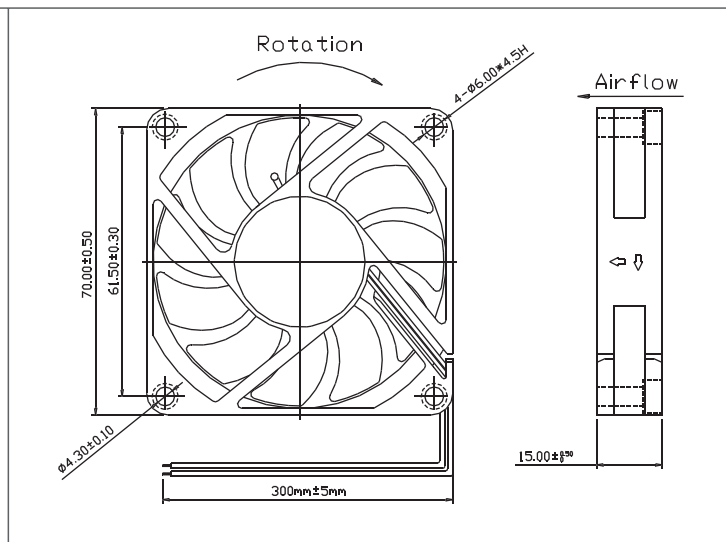

Customized Specifications are designed accordingly.  
Specifications are subject to change without notice. Please visit Y.S. TECH web site at <http://www.ys-tech.com.tw> for updated information.