


AXIAL DC FAN

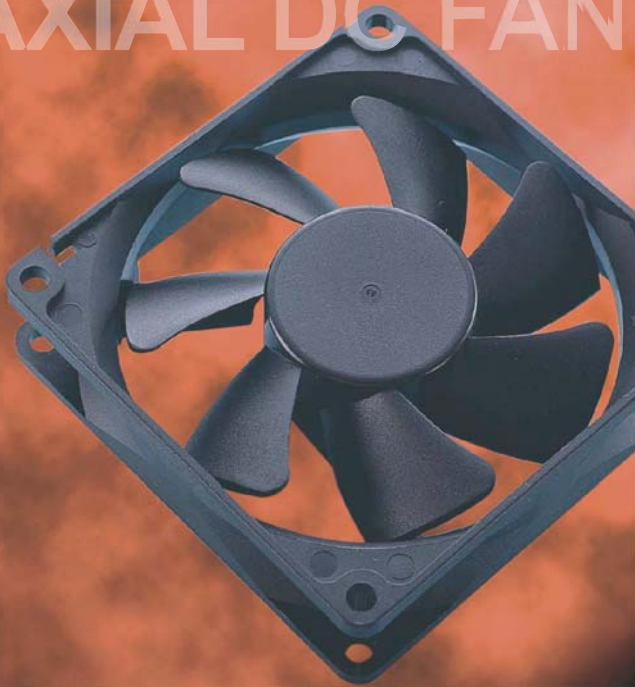

European Thermodynamics Limited
Intelligent Thermal Management

<http://www.etsy.com>
email: info@etsy.com
26-27 Chartwell Drive Ind Est
S.Wigston
Leicester, LE18 2FL, UK

FD8020 SERIES

80x80x20mm

- Airflow: 22.00~38.00 CFM
- Static Pressure: 1.30~3.80 mm-H₂O
- Blade / Housing: Plastic Material UL 94-0 P.B.T.
- Lead Wire: UL1007 #24 AWG
- Weight: 85g

Model	Bearing	Rated Voltage VDC	Operating Voltage Range VDC	Power Consumption W	Rated Speed RPM	Max. Airflow CFM	Max. Static Pressure mm-H ₂ O	Noise dB (A)	Life Hour	Weight g
FD1280203B-2A	2B	12	7~17	1.20	2,100	22.00	1.50	24.0	80,000	85
FD1280203B-2N	2B		7~17	1.20	2,100	22.00	1.50	24.0	80,000	85
FD1280205B-2A	2B		7~17	1.32	2,600	32.00	2.70	27.7	80,000	85
FD1280205B-2N	2B		7~17	1.32	2,600	32.00	2.70	27.7	80,000	85
FD1280207B-2A	2B		7~17	1.80	3,100	37.00	3.20	33.1	75,000	85
FD1280207B-2N	2B		7~17	1.80	3,100	37.00	3.20	33.1	75,000	85
FD2480207B-2A	2B	24	12~33	2.40	3,100	38.00	3.80	34.2	75,000	85
FD2480207B-2N	2B		12~33	2.40	3,100	38.00	3.80	34.2	75,000	85

● 2B: 2-ball bearing BS: 1-ball 1-sleeve bearing S: sleeve bearing

Voltage Available

05 12 24 48 53


Bearing System Available

2B BS S


Function Available

N A I F R Q S T M V C P W

PERFORMANCE P-Q CURVE

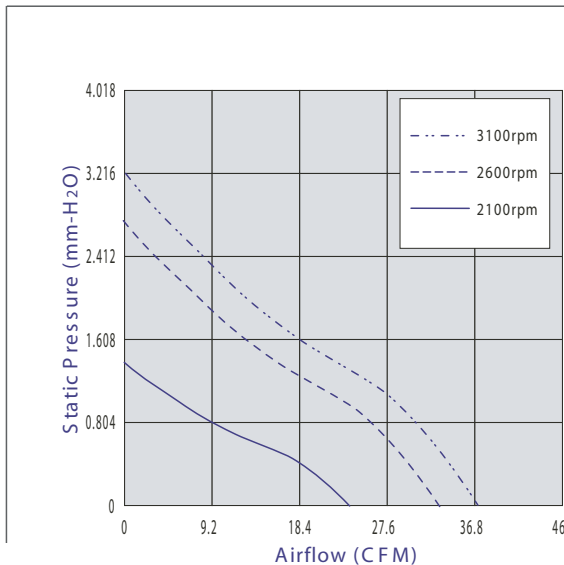

OUTLINE DIMENSIONS

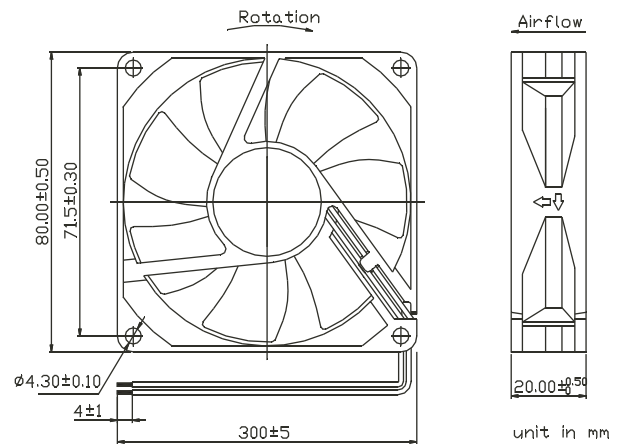

Customized Specifications are designed accordingly.
Specifications are subject to change without notice. Please visit Y.S. TECH web site at <http://www.ys-tech.com.tw> for updated information.