

# SPECIFICATION FOR APPROVAL

**CUSTOMER:** ARCERA

**MODEL NO:** 6025II (CeraDyna Fan)

**PART NO:** FD2460-C0151E2AL

**DATE** : June 1, 2013

CUSTOMER APPROVAL

<b>Taiwan Certification Office</b>
------------------------------------

<b>ARX GROUP &amp; ACT-RX TECHNOLOGY CORPORATION</b>
--

<b>2F, No. 192, Lien Chen Road, Chung Ho City,</b>
--

<b>Taipei, Taiwan, R.O.C.</b>
-------------------------------

<b>Approved by:</b>	<b>Marspan 6/1'13</b>	<b>QC by:</b>	<b>GuangYi 6/1'13</b>	<b>Checked by:</b>	<b>Tiger 6/1'13</b>	<b>Checked by:</b>	<b>ChangFeng 6/1'13</b>	<b>Prepared by:</b>	<b>Mabel 6/1'13</b>
-------------------------	---------------------------	---------------	---------------------------	------------------------	-------------------------	------------------------	-----------------------------	-------------------------	-------------------------

## CONTENTS

1. <u>SCOPE</u> .....	3
2. <u>ELECTRICAL</u> .....	3
3. <u>MATERIAL</u> .....	4
4. <u>MECHANICAL</u> .....	4
5. <u>EXPECTED LIFE SPAN (MTBF)</u> .....	4
6. <u>NOISE MEASUREMENT</u> .....	5
7. <u>RELIABILITY</u> .....	6-7
8. <u>PRODUCT LABEL</u> .....	7
9. <u>PERFORMANCE CHART</u> .....	8
10. <u>ASSEMBLY DIAGRAM</u> .....	9
11. <u>FREQUENCY GENERATOR (FG) SIGNAL OUTPUT</u> .....	10
12. <u>ORDERING AND OPERATING REMARKS</u> .....	11
13. <u>ROHS CERTIFICATION</u> .....	12-18

## 1. SCOPE

This document is a specification defining the electrical and mechanical characteristics of the product.

## 2. ELECTRICAL

Standard operating condition is 25°C, 65%RH ambient, unless otherwise specified.

	Item	Specification	Test Condition
1	Rated Voltage	24V ±10%	DC power supply
2	Rated Current	0.18 Amp (Typical)	DC power supply at Rated Voltage
3	Max. Current	0.23 Amp(Safety Regulation)	DC power supply at Rated Voltage. This is for Safety Regulation.
4	Rated Power	4.32 W	At Rated Voltage.
5	Auto restart function	1 Sec. ON , 5 Sec. OFF cycling	At Rated Voltage when Rotor Locked
6	Starting Voltage	12V (Max.)	DC power supply
7	Insulation Resistance	10 MΩ (Min.)	Input 500V(DC) between Lead wire(+) and housing
8	Speed	4500 RPM ±10%	Measured at 5 minutes after starting under 25±5°C, 65± 5%RH ambient
9	Acoustical Noise	31.00 dB(A)(measurement tolerance ± 2 dBA)	Measured at typical speed with an acoustic microphone 1 meter away from the fan intake in a test chamber with background noise level below 18dB(A) under ISO-3745 Standard, refer to NOISE MEASUREMENT ITEM 7.
10	Static Pressure	4.95 mm-H <sub>2</sub> O (0.19 inch-H <sub>2</sub> O )	Refer to PERFORMANCE CHART ITEM 9 at zero airflow. This measurement is performed AMCA 210-99 Standard.
11	Air Flow	19.62 CFM (0.56CMM )	Refer to PERFORMANCE CHART ITEM 9 at zero static Pressure. This measurement is performed AMCA 210-99 standard.
12	Direction of rotation	Counter-anticlockwise	DC power supply, viewed from impeller.

### 3. MATERIAL

<b>Impeller</b>	<b>PBT UL94-V0</b>
<b>Frame</b>	<b>PBT UL94-V0</b>
<b>Bobbin</b>	<b>PBT UL94-V0</b>
<input checked="" type="checkbox"/> + : Red <input checked="" type="checkbox"/> - : Black <input checked="" type="checkbox"/> O/P: <input type="checkbox"/> White <input checked="" type="checkbox"/> Yellow	24 <input type="checkbox"/> UL 1007 AWG26 <input checked="" type="checkbox"/> 28 <input type="checkbox"/>

### 4.MECHANICAL


<b>Dimensions</b>	<b>L * W * H =60*60*25 (mm)</b>
<b>Weight</b>	<b>60grams</b>
<b>Standard operating temperature range</b>	<b>-10 °C ~ 75 °C</b>
<b>Standard storage temperature</b>	<b>-20 °C ~ 80 °C</b>
<b>Bearing system</b>	<input type="checkbox"/> Two Ball Bearing <input type="checkbox"/> One Ball One Sleeve Bearing <input type="checkbox"/> Sleeve Bearing <input type="checkbox"/> Alloy Sleeve with Ceramic Shaft <input checked="" type="checkbox"/> Ceramic Bearing with Ceramic Shaft

### 5.EXPECTED LIFE SPAN ( MTBF )

At a standard operating condition of 25±5°C, 65±5%RH ambient, the expected life(expressed as Mean Time Between Failure) of products are evaluated under MIL-STD-781 Standard as below :

- Two Ball Bearing : 65000 hrs , Continuous operating under 25°C 65% RH
- One Ball One Sleeve Bearing : 50000 hrs , Continuous operating under 25°C 65% RH
- Sleeve Bearing : 30000 hrs , Continuous operating under 25°C 65% RH
- Alloy Sleeve with Ceramic Shaft : 300000 hrs , Continuous operating under 25°C 65%RH
- Ceramic Bearing with Ceramic Shaft : 500000 hrs , Continuous operating under 25°C 65% RH

## 6. NOISE MEASUREMENT :

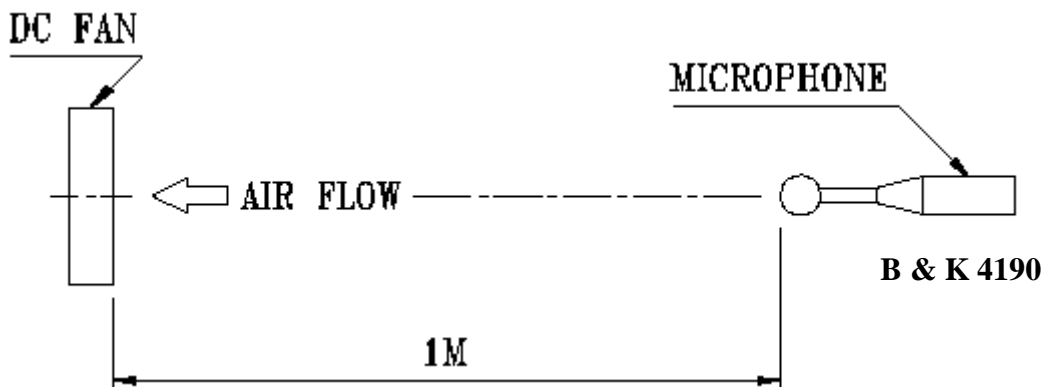


Noise is measured under Rated Voltage in free air in the anechoic chamber with B & K Nexus 4350 conditioning amplifier, with B & K 4190 microphone at a distance of one meter from the fan intake. The background noise is 18dBA max under the ISO-3745 Standard.

## 7. RELIABILITY

	Item	Specification	Test Condition
1	Locked Rotor Test	Flameproof and damage free	Rotor locked for 72 hrs with Rated Voltage
2	Reverse Voltage Test Protection	Yes	Reverse with Rated Voltage
3	Balance Test	No protruding beyond the circle within 10 seconds	The fan runs in a circle, scaled by fan radius plus 10mm, on a perfectly smooth plate for 10 seconds under the ISO 1940 G6.3 grade Standard.
4	Drop Test	All specified characteristics remain unchanged	Drop D.U.T.(The standard packing) from the test machine at 76cm below. Individual one angle, three diagonal corners and six planes under the ISTA-1A Standard.
5	Vibration Test	All specified characteristics remain unchanged	Ambient temp. : 25 °C±5 °C with Rated Voltage Amplitude : 0.4-2.5 mm Acceleration : 14.7 S/m <sup>2</sup> Frequency : 10HZ-60HZ Sweeping period : 1 min 10HZ-60HZ : 30 seconds 60HZ-10HZ : 30 seconds Total : 10 cycles This test is under the IEC 68-2-6 Standard.
6	High/Low Temperature Cycling	All specified characteristics remain unchanged	20 minutes slew rate +75 °C (1 hr) , -10 °C (1 hr) Total : 36 cycles with Rated Voltage This test is under IEC 68-2-38 Standard.
7	Low Temp. Storage	All specified characteristics remain unchanged	Tested under standard condition ; after 500hrs, -20 °C storage, without power supply. This test is under IEC 68-2-1 Standard.
8	High Temp. Storage	All specified characteristics remain unchanged	Tested under standard condition ; after 500hrs, 80 °C storage, without power supply. This test is under IEC 68-2-2

			<b>Standard.</b>
9	<b>Dielectric Strength</b>	<b>Max 1mA of leakage Current</b>	<b>Input 500V(AC) for 1 sec between lead (+/-) and housing</b>


## 8. PRODUCT LABEL

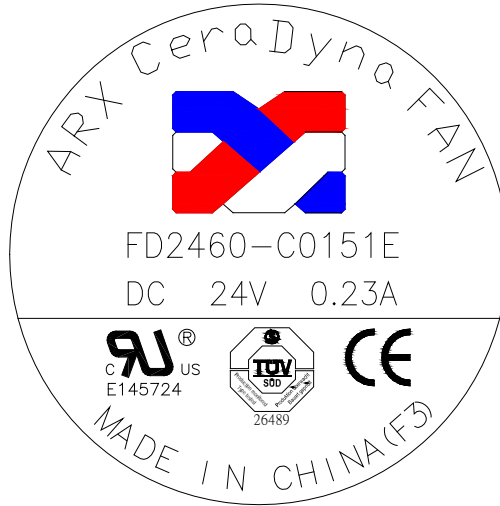

## 9. PERFORMANCE CHART


This measurement is according to the AMCA 210-99 Standard.

**PQ curve for FD2460-C0151E3AL under Rated Voltage.**

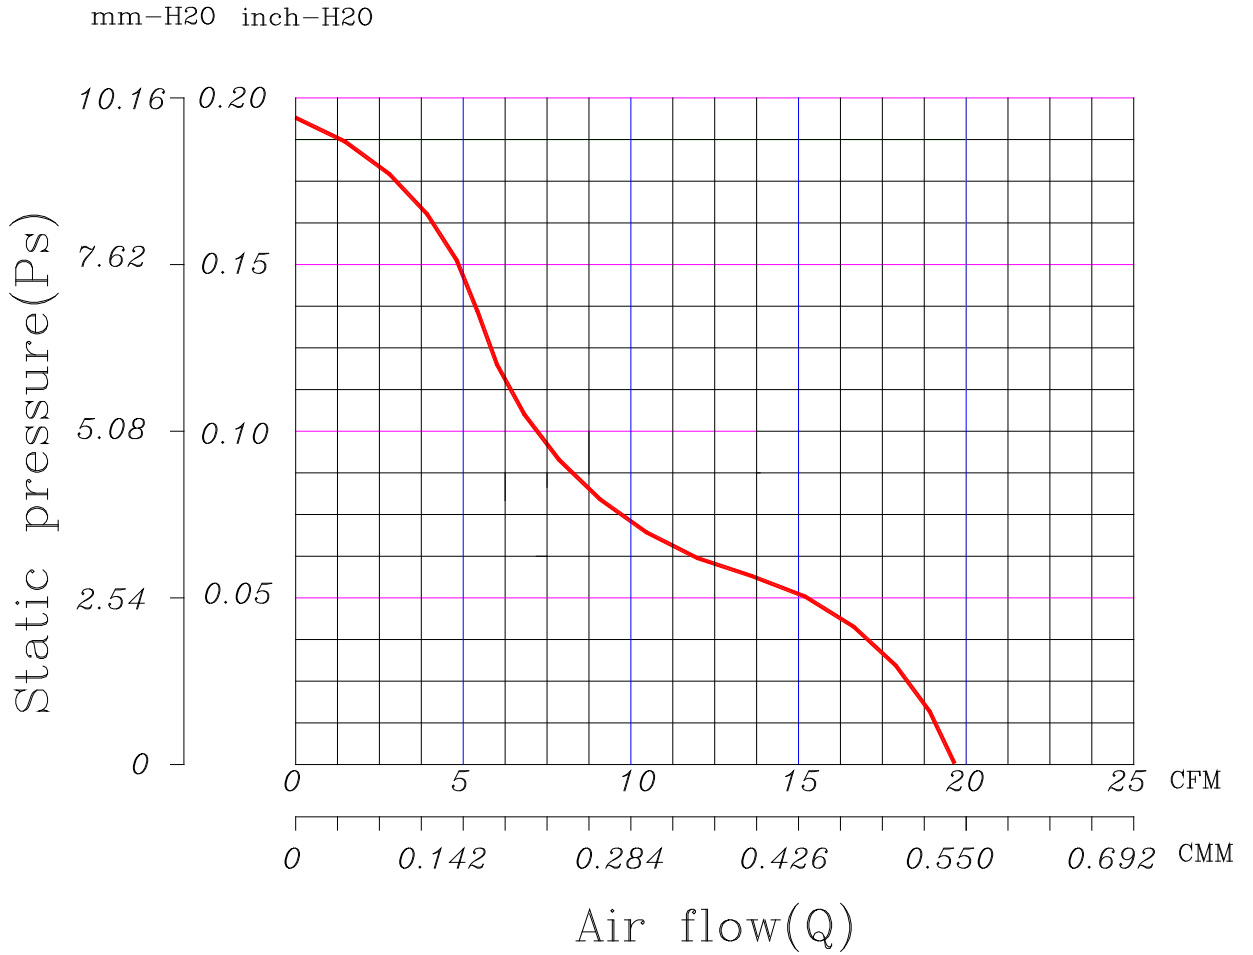



### 10.ASSEMBLY DIAGRAM

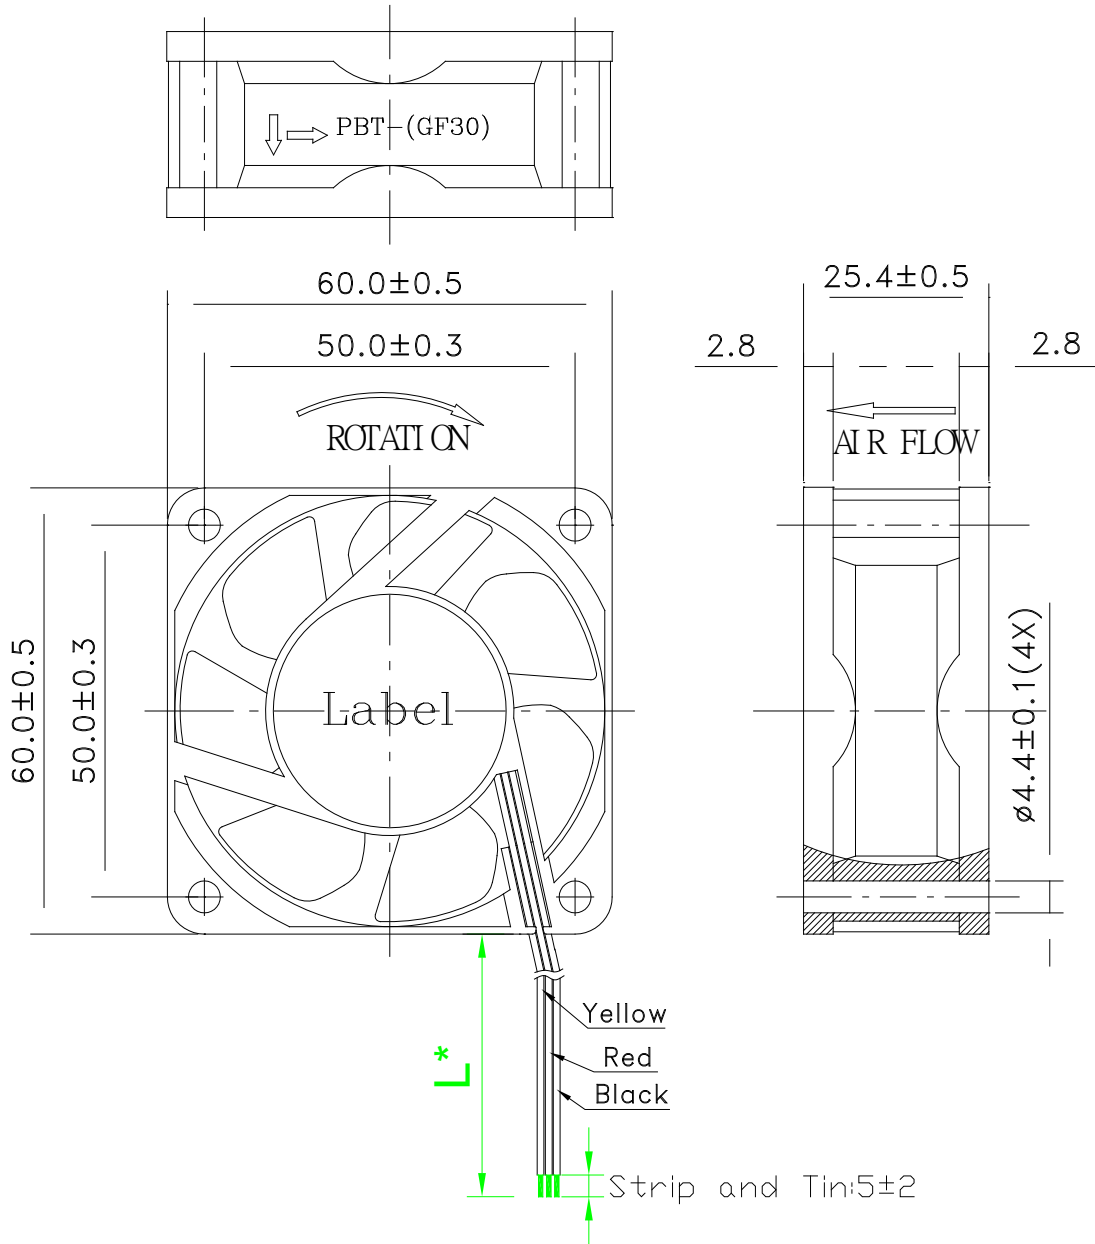


General Dimension.Tolerances (Unit:mm)		
0-3	±	0.3
3-30	±	0.4
31-60	±	0.5
61-100	±	0.6
101 and Over	±	0.6
Angles	±	2°

**Note :**

- L\* : Lead wire length : 285±10mm ( From frame edge )**

## 11. FREQUENCY GENERATOR(FG) SIGNAL Output :


### 11.1 Output circuit : Open collector mode

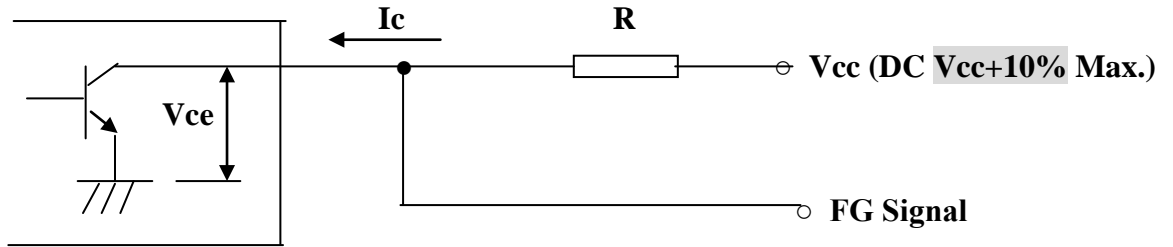

11.2  $R=V/I$  (Out “R” value can be got by calculating)

11.3 Specification :  $I_c= 5mA$  Max.

11.4 Frequency Generator Waveform :

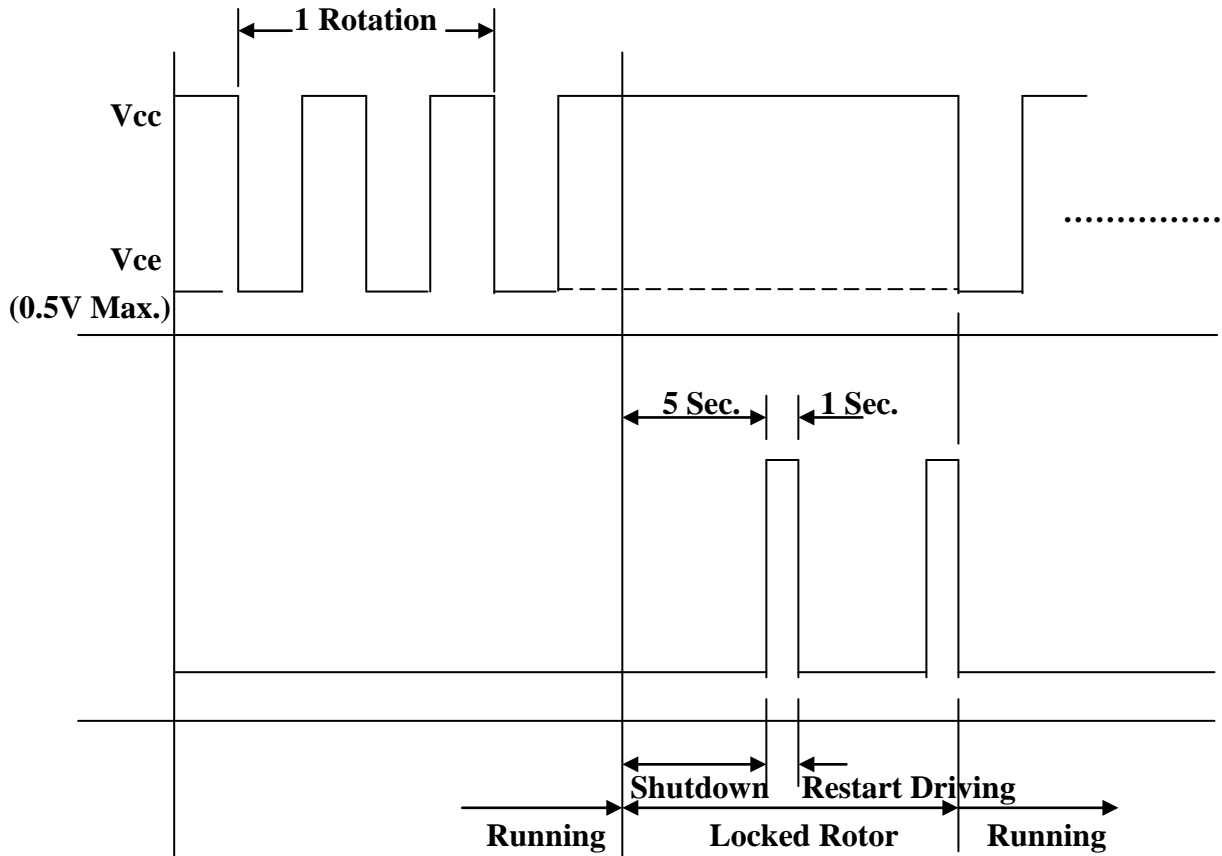


## 12. ORDERING AND OPERATING REMARKS

12.1 Please indicate Part No. on every order.

12.2 For those not specified but vital to your requirement, ACT-RX is in full position to supply qualified substitutes.

12.3 ACT-RX does not guarantee the product if applications exceed specified limitations.

12.4 Please do not touch the impeller and never carry the fan the lead wires. The bearings and the lead wires may be damaged.

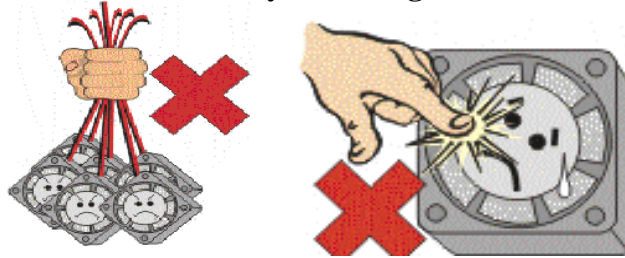

12.5 Please do not use the fan in the environment of corrosive gas or liquid.

12.6 Please do not store the fan in the environment of high humidity. Please avoid storage of the fan over 6 months . For long term storage, please connect power to the fan shortly every 6 months even through the fan is stored in room temperature.

12.7 Improper use may lead to malfunction. To ensure normal operation, avoid dipping the fan into watery and oily liquid, or exposing it to heat, etc.

12.8 Please do not lock the rotor for those fan models without Auto Restart function during operation to prevent over heating which may cause permanent damage.

12.9 Warrantee period is 12 months max. under the environment condition IP-20 specified in IEC60529.

12.10 All specifications subject to change without prior notice.

### 13. ROHS CERTIFICATION



## Test Report

ACT-RX TECHNOLOGY CORPORATION  
2F, NO. 192, LIEN CHEN ROAD, CHUNG HO CITY, TAIPEI  
HSIEN 235, TAIWAN, R. O. C.

Report No. : CE/2006/64775  
Date : 2006/06/21  
Page : 1 of 7

**The following merchandise was (were) submitted and identified by the client as :**

Type of Product : DC FAN  
Sample Received : 2006/06/14  
Testing Date : 2006/06/14 TO 2006/06/21

=====  
**Test Result** : - Please see the next page -

  
Daniel Yeh, M.R. Operation Manager  
Signed for and on behalf of  
SGS TAIWAN LTD.

The content of this PDF file is in accordance with the original issued reports for reference only. This Test Report cannot be reproduced, except in full, without prior written permission of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS TAIWAN LIMITED NO. 136-1, Wu Kung Road, WuKu Industrial Zone, Taipei county, Taiwan.  
t(886-2) 22993939 f(886-2) 2299-3237 www.sgs.com.tw



## Test Report

ACT-RX TECHNOLOGY CORPORATION  
 2F, NO. 192, LIEN CHEN ROAD, CHUNG HO CITY, TAIPEI  
 HSIEN 235, TAIWAN, R. O. C.

Report No. : CE/2006/64775  
 Date : 2006/06/21  
 Page : 2 of 7

### Test Result

PART NAME NO.1 : MIXED ALL PLASTIC (WIRE, FAN FRAME, 扇葉, 線架, MAGNETIN STRIP)  
 PART NAME NO.2 : MIXED ALL METAL (ENAMELE, BEARING, SILICON STEEL PLATE, SHAFT, MOTOR CASE, SPRING, PCB)

Test Item (s):	Unit	Method	MDL	Result	
				No.1	No.2
Asbestos					
Amosite(CAS NO.012172-73-5)	%	As per NIOSH 9000 method. Analysis was performed by XRD.	1	Negative	---
Anthophyllite(CAS NO.017068-78-9)	%	As per NIOSH 9000 method. Analysis was performed by XRD.	1	Negative	---
Chrysotile(CAS NO.012001-29-5)	%	As per NIOSH 9000 method. Analysis was performed by XRD.	1	Negative	---
Tremolite(CAS NO.014567-73-8)	%	As per NIOSH 9000 method. Analysis was performed by XRD.	1	Negative	---
Crocidolite(CAS NO.012001-28-4)	%	As per NIOSH 9000 method. Analysis was performed by XRD.	1	Negative	---
Actinolite(CAS NO.013768-00-8)	%	As per NIOSH 9000 method. Analysis was performed by XRD.	1	Negative	---

Test Item (s):	Unit	Method	MDL	Result	
				No.1	No.2
Chlorinated Paraffin (C10~C13) (CAS NO:010871-26-2)	%	With reference to USEPA3540C or USEPA3550C. Analysis was performed by GC/MS or GC/ECD.	0.01	N.D.	---

The content of this PDF file is in accordance with the original issued reports for reference only. This Test Report cannot be reproduced, except in full, without prior written permission of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS TAIWAN LIMITED | NO. 136-1, Wu Kung Road, WuKu Industrial Zone, Taipei county, Taiwan.  
 t(886-2) 22993939 f(886-2) 2299-3237 www.sgs.com.tw



## Test Report

ACT-RX TECHNOLOGY CORPORATION  
 2F, NO. 192, LIEN CHEN ROAD, CHUNG HO CITY, TAIPEI  
 HSIEN 235, TAIWAN, R. O. C.

Report No. : CE/2006/64775  
 Date : 2006/06/21  
 Page : 3 of 7

Test Item (s):	Unit	Method	MDL	Result	
				No.1	No.2
Monobromobiphenyl	%	With reference to USEPA3540C or USEPA3550C. Analysis was performed by HPLC/DAD, LC/MS or GC/MS. (prohibited by 2002/95/EC (RoHS), 83/264/EEC, and 76/769/EEC)	0.0005	N.D.	---
Dibromobiphenyl	%		0.0005	N.D.	---
Tribromobiphenyl	%		0.0005	N.D.	---
Tetrabromobiphenyl	%		0.0005	N.D.	---
Pentabromobiphenyl	%		0.0005	N.D.	---
Hexabromobiphenyl	%		0.0005	N.D.	---
Heptabromobiphenyl	%		0.0005	N.D.	---
Octabromobiphenyl	%		0.0005	N.D.	---
Nonabromobiphenyl	%		0.0005	N.D.	---
Decabromobiphenyl	%		0.0005	N.D.	---
<b>Total PBBs (Polybrominated biphenyls)/Sum of above</b>	%		-	N.D.	---
Monobromobiphenyl ether	%	With reference to USEPA3540C or USEPA3550C. Analysis was performed by HPLC/DAD, LC/MS or GC/MS. (prohibited by 2002/95/EC (RoHS), 83/264/EEC, and 76/769/EEC)	0.0005	N.D.	---
Dibromobiphenyl ether	%		0.0005	N.D.	---
Tribromobiphenyl ether	%		0.0005	N.D.	---
Tetrabromobiphenyl ether	%		0.0005	N.D.	---
Pentabromobiphenyl ether	%		0.0005	N.D.	---
Hexabromobiphenyl ether	%		0.0005	N.D.	---
Heptabromobiphenyl ether	%		0.0005	N.D.	---
Octabromobiphenyl ether	%		0.0005	N.D.	---
Nonabromobiphenyl ether	%		0.0005	N.D.	---
Decabromobiphenyl ether	%		0.0005	N.D.	---
<b>Total PBBEs(PBDEs) (Polybrominated biphenyl ethers)/Sum of above</b>	%		-	N.D.	---
<b>Total of Mono to Nonabrominated biphenyl ether. (Note 4)</b>	%		-	N.D.	---

The content of this PDF file is in accordance with the original issued reports for reference only. This Test Report cannot be reproduced, except in full, without prior written permission of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS TAIWAN LIMITED NO. 136-1, Wu Kung Road, WuKu Industrial Zone, Taipei county, Taiwan.  
 t(886-2) 22993939 f(886-2) 2299-3237 www.sgs.com.tw

## Test Report

ACT-RX TECHNOLOGY CORPORATION  
 2F, NO. 192, LIEN CHEN ROAD, CHUNG HO CITY, TAIPEI  
 HSIEN 235, TAIWAN, R. O. C.

Report No. : CE/2006/64775  
 Date : 2006/06/21  
 Page : 4 of 7

Test Item (s):	Unit	Method	MDL	Result	
				No.1	No.2
Mirex(CAS NO:002385-85-5)	ppm	Analysis was performed by GC/MS.	4	N.D.	---

Test Item (s):	Unit	Method	MDL	Result	
				No.1	No.2
PCBs(Polychlorinated Biphenyls)(CAS NO:001336-36-3)	ppm	With reference to USEPA 8082A. Analysis was performed by GC/MS or GC/ECD.	0.5	N.D.	---

Test Item (s):	Unit	Method	MDL	Result	
				No.1	No.2
Polychlorinated Naphthalene	ppm	With reference to USEPA 8081B. Analysis was performed by GC/MS.	5	N.D.	---

Test Item (s):	Unit	Method	MDL	Result	
				No.1	No.2
PCTs(Polychlorinated Terphenyls)	ppm	With reference to USEPA 8082A. Analysis was performed by GC/MS or GC/ECD.	0.5	N.D.	---

Test Item (s):	Unit	Method	MDL	Result	
				No.1	No.2
PVC (CAS No:9002-86-2)	%	Analysis was performed by FTIR/ATR and Pyrolyzer-GC/MS.	1	Negative	---

The content of this PDF file is in accordance with the original issued reports for reference only. This Test Report cannot be reproduced, except in full, without prior written permission of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS TAIWAN LIMITED NO. 136-1, Wu Kung Road, WuKu Industrial Zone, Taipei county, Taiwan.  
 t(886-2) 22993939 f(886-2) 2299-3237 www.sgs.com.tw





## Test Report

ACT-RX TECHNOLOGY CORPORATION  
 2F, NO. 192, LIEN CHEN ROAD, CHUNG HO CITY, TAIPEI  
 HSIEN 235, TAIWAN, R. O. C.

Report No. : CE/2006/64775  
 Date : 2006/06/21  
 Page : 5 of 7

Test Item (s):	Unit	Method	MDL	Result	
				No.1	No.2
Chromium VI (Cr+6)	ppm	UV-VIS(US EPA 7196A) after reference to US EPA 3060A.	2	N.D.	N.D.
Cadmium (Cd)	ppm	ICP-AES after reference to EN 1122, method B:2001 or other acid digestion.	2	N.D.	N.D.
Mercury (Hg)	ppm	ICP-AES after reference to US EPA 3052 or other acid digestion.	2	N.D.	N.D.
Lead (Pb)	ppm	ICP-AES after reference to US EPA 3050B or other acid digestion.	2	N.D.	23.3

- NOTE: (1) N.D. = Not detected (<MDL)  
 (2) ppm = mg/kg  
 (3) MDL = Method Detection Limit  
 (4) Decabromobiphenyl ether (DecaBDE) in polymeric applications is exempted by  
 Commission Decision of 13 Oct 2005 amending Directive 2002/95/EC notified  
 under document 2005/717/EC.  
 (5) PBBEs=PBDEs=Polybrominated Diphenyl Ethers=PBDOs=PBBOs.  
 (6) " - " = Not Regulation  
 (7) The MDL is 5ppm for the single compound of CP

The content of this PDF file is in accordance with the original issued reports for reference only. This Test Report cannot be reproduced, except in full, without prior written permission of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS TAIWAN LIMITED NO. 136-1, Wu Kung Road, WuKu Industrial Zone, Taipei county, Taiwan.  
 t(886-2) 22993939 f(886-2) 2299-3237 www.sgs.com.tw



## Test Report

ACT-RX TECHNOLOGY CORPORATION  
2F, NO. 192, LIEN CHEN ROAD, CHUNG HO CITY, TAIPEI  
HSIEN 235, TAIWAN, R. O. C.

Report No. : CE/2006/64775  
Date : 2006/06/21  
Page : 6 of 7

PART NAME NO.1:



The content of this PDF file is in accordance with the original issued reports for reference only. This Test Report cannot be reproduced, except in full, without prior written permission of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS TAIWAN LIMITED

NO. 136-1, Wu Kung Road, WuKu Industrial Zone, Taipei county, Taiwan.  
t(886-2) 22993939 f(886-2) 2299-3237 www.sgs.com.tw

## Test Report

ACT-RX TECHNOLOGY CORPORATION  
2F, NO. 192, LIEN CHEN ROAD, CHUNG HO CITY, TAIPEI  
HSIEN 235, TAIWAN, R. O. C.

Report No. : CE/2006/64775  
Date : 2006/06/21  
Page : 7 of 7

PART NAME NO.2:



The content of this PDF file is in accordance with the original issued reports for reference only. This Test Report cannot be reproduced, except in full, without prior written permission of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS TAIWAN LIMITED

NO. 136-1, Wu Kung Road, WuKu Industrial Zone, Taipei county, Taiwan.  
t(886-2) 22993939 f(886-2) 2299-3237 www.sgs.com.tw