


GM250-49-45-25

Thermoelectric Generator Module

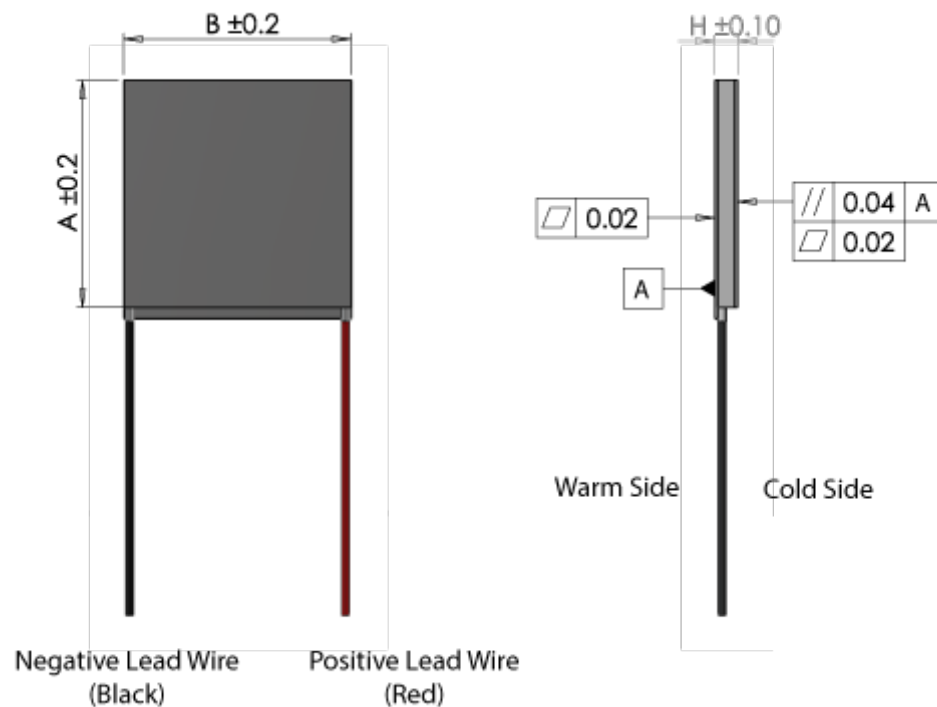

Geometric Dimensions

A	62mm
B	62mm
H	approx. 5.3mm

Parameters for hot side temp 250°C and cold side temp 30°C

Matched load output power	15.24W
Matched load resistance	0.26Ω ± 15%
Open circuit voltage	4.1V
Matched load output	7.6A
Matched load output voltage	2.0V
Heat flow through module	~312W
Maximum compress (non-destructive)	1MPa
Maximum operation temperature	Hot side - 250°C. Cold side - 175°C

Features

- Compact structure (no moving parts)
- Reliable performance
- Maintenance-free
- Noise-free operation
- Low-carbon, green technology
- High temperature



