
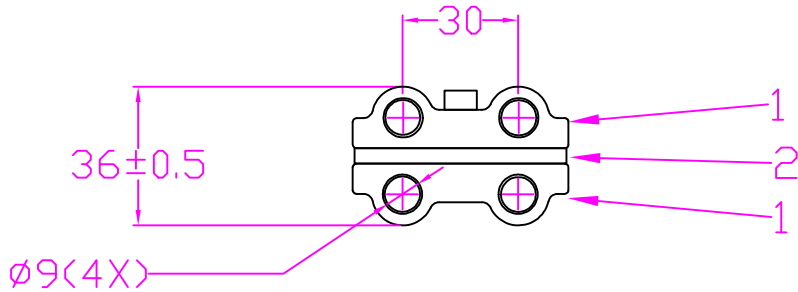



SPECIFICATIONS (Th=32°C)	CODE #	DESCRIPTION
Heat Transfer Cold side	L	Liquid flow cooling
Heat Transfer Warm side	L	Liquid heat removal
Cascade	-	
Cooling Effect	056	56 W at $dT=0^\circ C$ and $Th=32^\circ C$
Voltage Nominal	12	12 VDC (14,7 VDC MAX)
Current Nominal TE-Module(s)		5,4 A at $dT=0^\circ C$ PE-127-14-15-S
Fan(s) Cold side	0	None
Fan(s) Warm side	0	None
Thermostat / Regulation & Sensor	0	None
Thermostat Settings Trimmable Accuracy & Hysteresis	0	None
Thermostat Position & Casing	0	None
Options: Protections Rapid Cooling / Economy	0	None
Weight		0,4 kg net
Overheating Thermostat		None (available on request)
Max. operating Temperature		69°C warm side liquid
Enclosed		-
Packing		Individual cardboard box

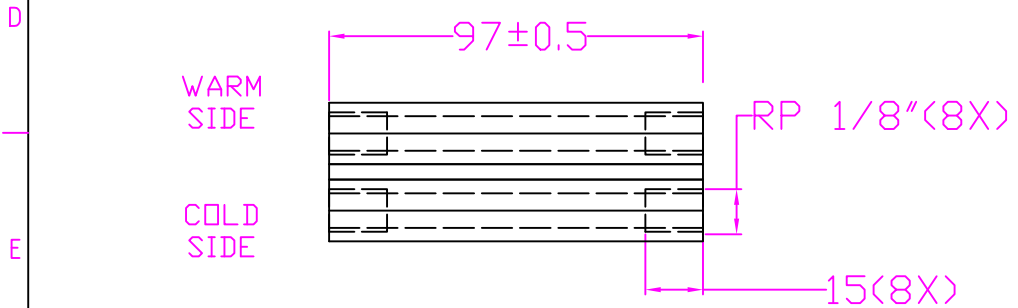

POS.	ITEM No.:	DESCRIPTION	QTY	NOTE
1	Heat sink	Anodised Alu, silver	1+1	Turbulators inserted
2	Seal	Polyethylene	1	

Qty/Product:	Material:	Project: Standard	
Designed by: Pavel Cech	Approved by / sign.: Johan Seberlich	Customer:	Date/Rev.No: 0-00-02-03
 Supercool AB Box 27, 40120 Göteborg, Sweden tel: +46 31 420530, fax: +46 31 247909 e-mail: pavel@supercool.se www.supercool.se		COOLING-ASSEMBLY	
		LL-056-12-00-00-00	SS-IS02768-1
			Sheet 1/1