
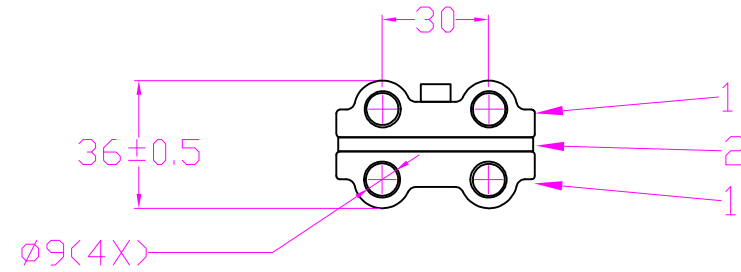



SPECIFICATIONS (Th=32°C)	CODE #	DESCRIPTION
Heat Transfer Cold side	L	Liquid flow cooling
Heat Transfer Warm side	L	Liquid heat removal
Cascade	-	
Cooling Effect	110	110 W at dT=0°C and Th=32°C
Voltage Nominal	24	24 VDC (29,5 VDC MAX)
Current Nominal		5,3 A at dT=0°C
TE-Module(s)		PE-127-14-15-S (2S)
Fan(s) Cold side	0	None
Fan(s) Warm side	0	None
Thermostat / Regulation & Sensor	0	None
Thermostat Settings	0	None
Trimmable		
Accuracy & Hysteresis		
Thermostat Position & Casing	0	None
Options: Protections	0	None
Rapid Cooling / Economy		None
Weight		0,6 kg net
Overheating Thermostat		75°C±5°C on warm side heat sink surface
Max. operating Temperature		68°C warm side liquid
Enclosed		-
Packing		Individual cardboard box

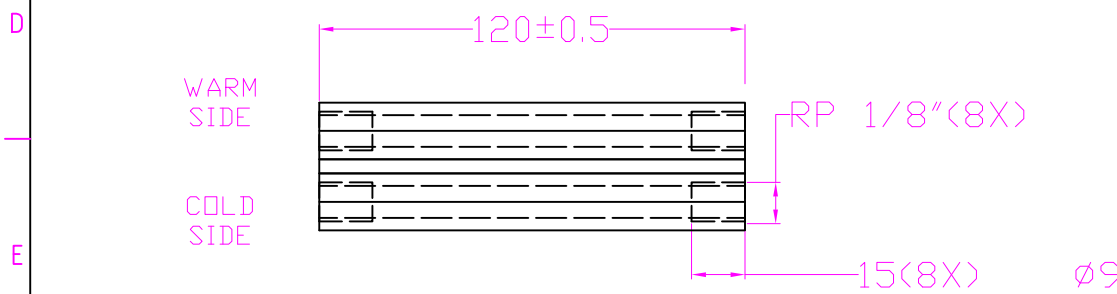

POS.	ITEM No.:	DESCRIPTION	QTY	NOTE
1	Heat sink	Anodised Alu, silver	1+1	Turbulators inserted
2	Seal	Polyethylene	1	

Qty/Product:		Change: Wire lengths		Project: Standard	
Designed by:	Approved by / sign.:	Customer:	Date/Rev.No:	Scale	
Pavel Cech	Jan Johansson		0-00-11-02	1	
		Supercool AB Box 27, 40120 Göteborg, Sweden tel: +46 31 420530, fax: +46 31 247909 e-mail: pavel@supercool.se www.supercool.se		COOLING-ASSEMBLY LL-110-24-00-00-00	
			SS-ISO2768-1	Sheet 1/1	