


Peltier Cooler Module - High Temperature Cycling

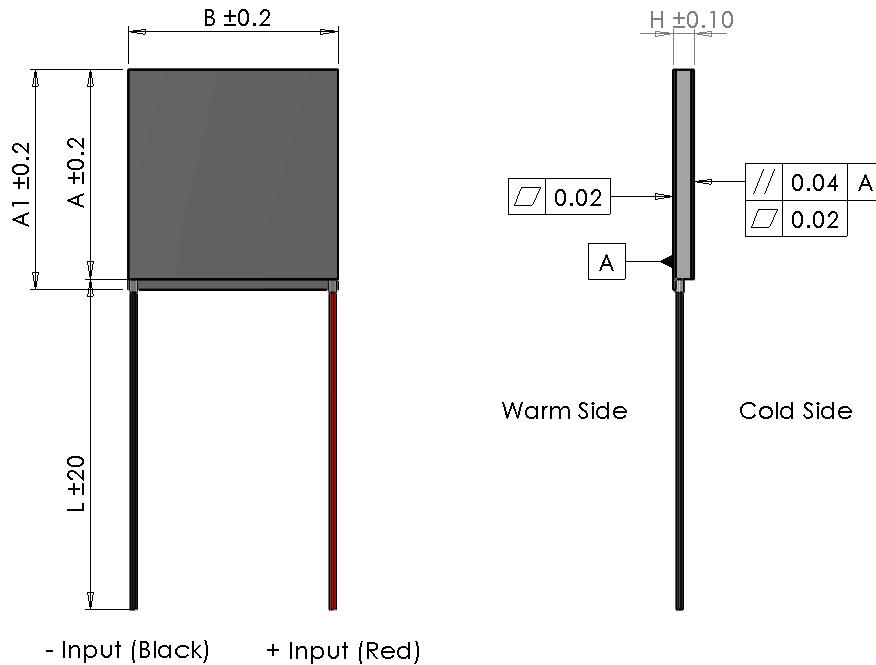

Features

- RoHs and Reach compliant
- Solid-state reliability
- High integrity nickel diffusion barriers on elements
- High strength for rugged environments
- Porched style for enhanced leadwire strength
- Sealed & lapped for multi-module applications





Data sheet

I _{max}	[A]	7.4
V _{max}	[V _{dc}]	14.7
P _{c max}	[W]	71
ACR	[Ω]	1.6
ΔT _{max}	[°C]	66
Max. hot side temp.	[°C]	180
A	[mm]	40
A1	[mm]	44
B	[mm]	40
H	[mm]	3.5
L	[mm]	100
Wire	AWG	20






- (At hot side temperature $T_h = 27^\circ\text{C} / 300\text{K}$, under dry N_2)
- P_{c max} = Cooling power at $\Delta T = 0$ and $I = I_{\text{max}}$
- ΔT_{max} = Temperature difference at $I = I_{\text{max}}$ and $P_c = 0$
- Max mounting pressure: 1.5MPa
- AF250 Teflon wire, 600V, -80 to +250degC



Data sheet - At hot side temperature 25°C

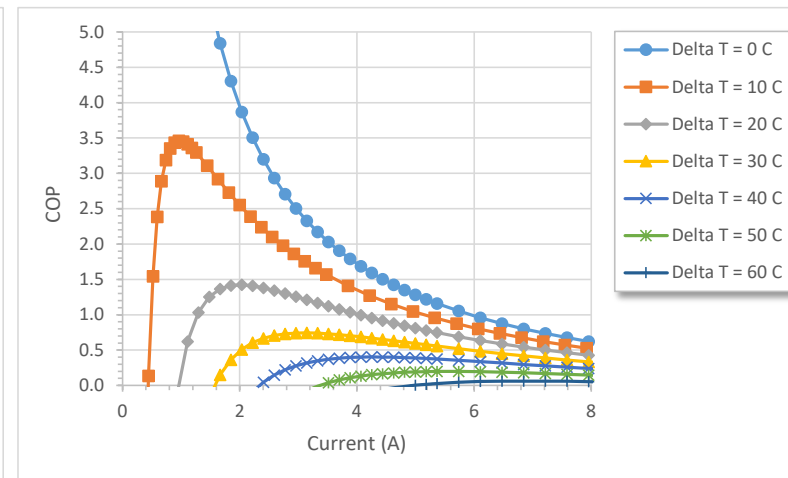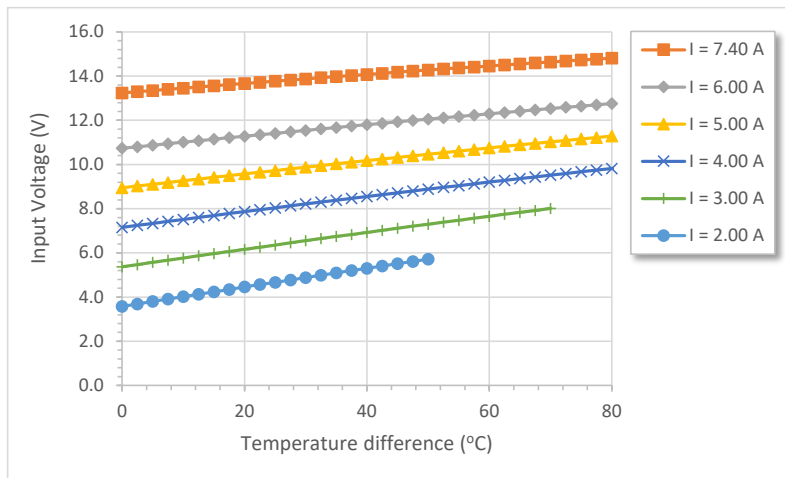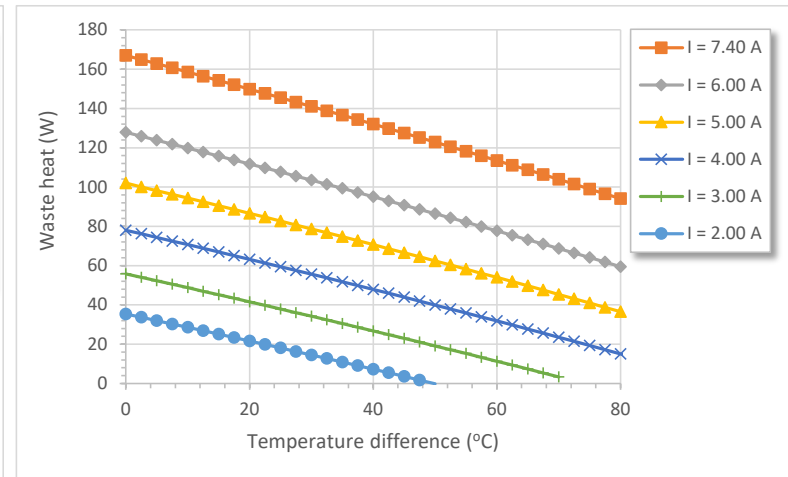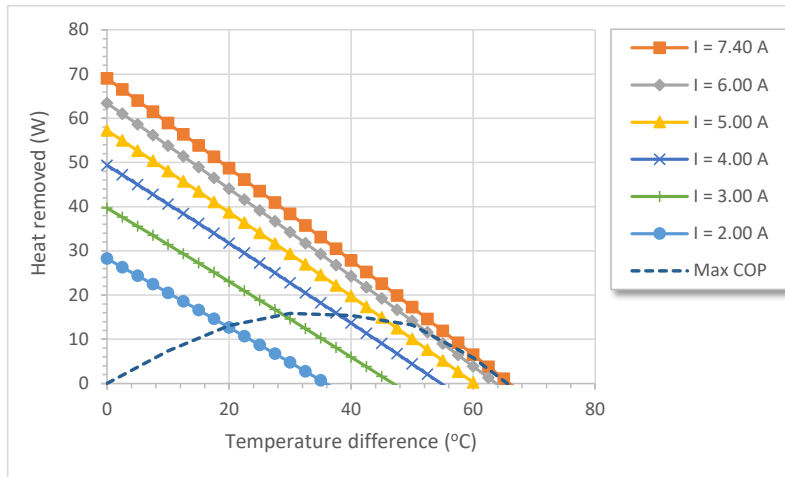

Data sheet - At hot side temperature 50°C

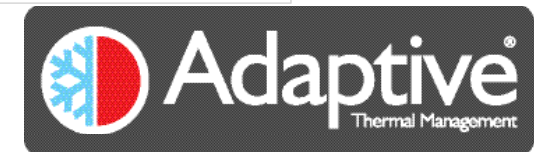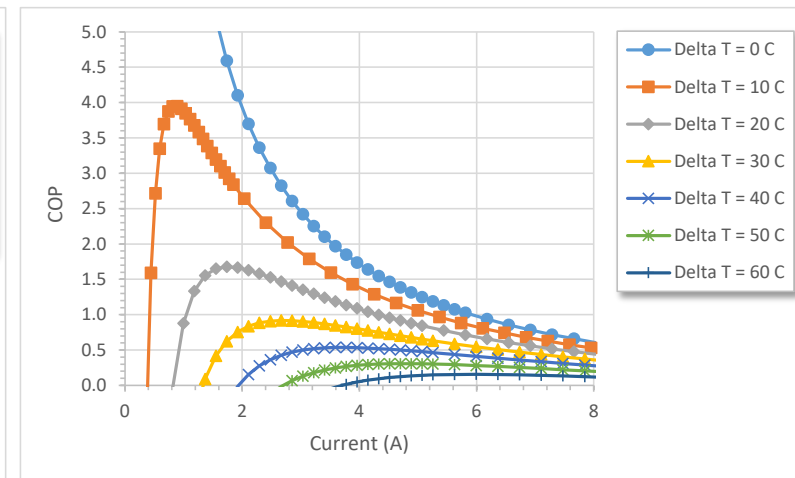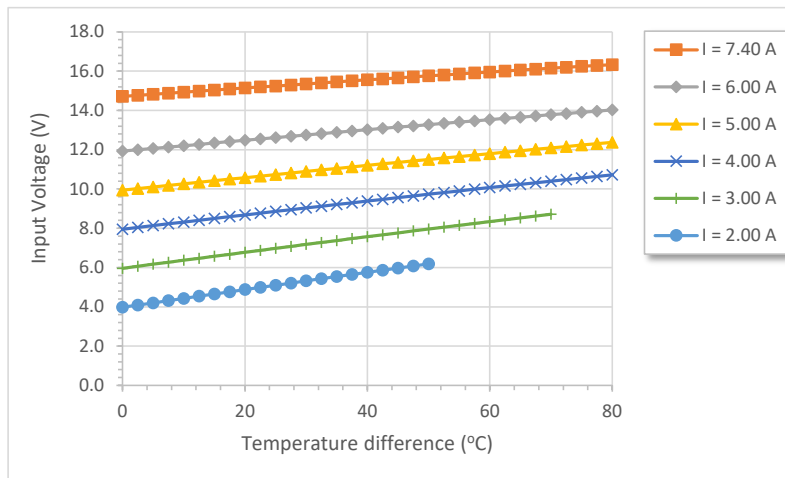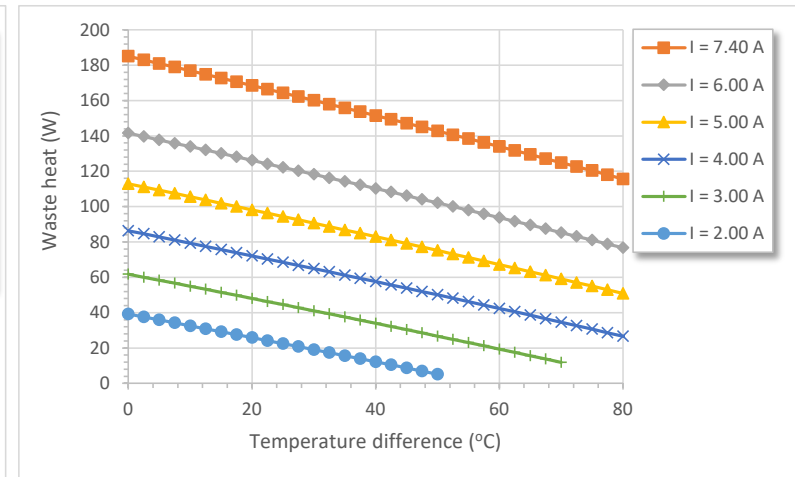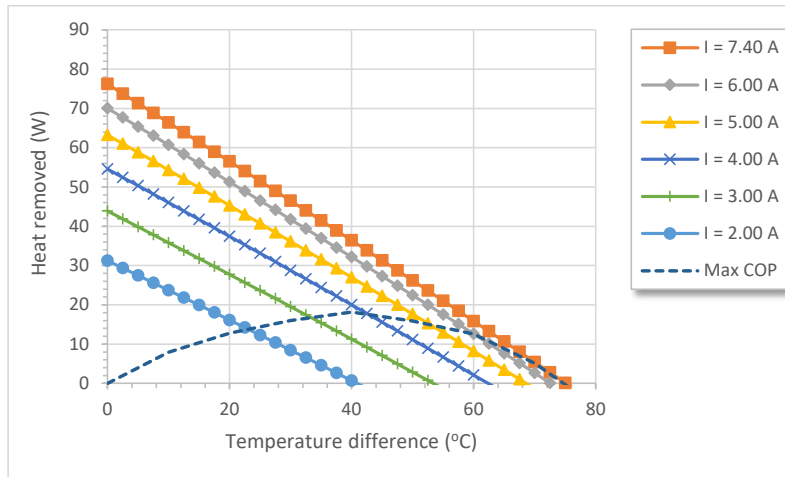

Data sheet - At hot side temperature 75°C

